

# HASLIN

## Manage Mobile Cranes & Lifting Operation Procedure

**SEQ-PR-077**

### Document Revision Control

Rev:	Date:	Description:
2	14/11/2016	Update to Haslin's new branding
3	23/6/17	Updated Lifting Equipment and Inspection
4	8/9/17	Clarifying methodology and use of form O68
5	12/9/17	Updated Frequency Table and Section 14 Lifting Clutches
6	16/10/18	Overhead Powerlines Permit
7	8/6/22	Definition of Routine, Non-Routine Lifts
8	20/07/2023	Workboxes, Crane inspection, training





### Table of Contents:

1. Purpose .....	3
2. Definitions .....	3
3. Procedure .....	3
3.1. Identify and Assess Work Conditions and Tasks .....	3
3.2. Identify Training and Competency Requirements .....	3
3.3. Identify Controls .....	4
3.4. Include Controls in Work Methods Statement .....	4
3.4.1. Identify Lift Assessment Requirements .....	4
3.4.2. Ground Conditions and Surrounding Area .....	5
3.5. Crane Lifted Work Boxes .....	6
3.5.1. Work Box Requirements .....	6
3.5.2. Crane Requirement .....	6
3.5.3. Using crane Lifting Boxes .....	7
3.6. Lifting Equipment .....	7
3.6.1. Identifiable Tags on Chains, Slings, Hooks, Clutches and Shackles .....	9
4. Swift Lift Clutches Section 2.6 of AS 3850.1:2015 .....	12
4.1. Commence Work .....	13
4.2. Monitor Work .....	13
4.3. Crane Inspection, Maintenance and Registration .....	13
5. Flow Charts .....	15
6. Training .....	17
7. Relevant Templates, Forms and Checklists .....	17



### 1. Purpose

This procedure describes the how to identify, assess and control risks associated with mobile cranes and lifting operations in accordance with the Hierarchy of controls.

Elimination of the risk must be sought in the first instance, but if not reasonably practicable to eliminate, all effort must be made to minimize the risk. Good practice and correct lifting methods can move large objects efficiently, safely and reduce manual handling operations. Incorrect lifting methods however, can lead to major accidents and fatalities. The process of carrying out correct and safe lifting operations involves a range of requirements, which must be considered during the planning of any lifting operation.

### 2. Definitions

**Lift Study** - A proper crane lift study will provide you with a visual representation of what you're planning. It will cover setup and configuration of the crane, as well as where it needs to travel. It also covers details about rigging and ground bearing pressure.

**Lift Plan** - A lift plan encompasses risk assessments, method statements and other relevant information such as drawings, schedules and photographs. It is a site-specific document outlining everyone's roles in the lifting operation to ensure a lift is carried out successfully.

**Routine Lift** - A lift can be categorised as a routine lift if it is repetitive in nature and involves loads that are similar in shape, size and weight, i.e., multiple lifts of similar items. The underlying principle is that the risks involved in a routine lift are already known and mitigated.

**Non-Routine Lift** - A non-routine lift refers to lifting operation that is complex, carried out for the first time or lifting close to the lifting capacity of the crane. For example, a tandem "tilt-up" operation (i.e., lifting using two or more cranes to tilt a long structure from horizontal position to vertical) is a complex non-routine lift. It will require a detailed risk assessment and engineering method before the lift is carried out.

**Work-Box** - a personnel carrying device designed to be suspended from a crane to provide a working area for a person elevated by and working from the device

### 3. Procedure

#### 3.1. Identify and Assess Work Conditions and Tasks

**Accountability: Project Manager**

- Identify the work conditions or tasks associated with mobile cranes and lifting operations.
- Assess the risk of the tasks.

Refer to Procedure: Risk management SEQ-PR-001

#### 3.2. Identify Training and Competency Requirements

**Accountability: Project Manager**

Identify the training and competency requirements, using AS 2550.1 Crane, hoist and winches - Safe use, Safe Work Australia General Guide for Cranes.



### 3.3. Identify Controls

#### Accountability: Project Manager

- Determine if the controls nominated in the Project Risk Register can be used otherwise, identify other controls that will apply using: AS 2550.1 Crane, hoist and winches - Safe use.
- Advise the Project Engineer where the control identified in the Project Risk Register cannot be applied.

### 3.4. Include Controls in Work Methods Statement

#### Accountability: Project Engineer and Site Engineer

- Identify the Safety Essential tasks that apply to the construction area where there is a risk to a worker where:
  - Work is carried out with mobile cranes, or
  - During lifting operations or
  - Crane work boxes
- Include controls and training and competency requirements in the Work Method Statement.
- Create SWMS for the tasks identified and obtain approval before commencing work.
  - Refer to Procedure: SEQ-PR-001 Risk Management section 6.14.

#### 3.4.1. Identify Lift Assessment Requirements

##### Accountability: Project Engineer and Site Engineer, Crane Operator (Rigger/Dogman)

- Identify the lift category and apply the required assessment requirement.

Lift Category	Assessment Requirement		
Load Details	Lift Study	Lift Plan	SWMS only
Gross load over 50Ton or over 90% of crane capacity - Non Routine Lifts	Yes		
Gross load between 15Ton-50Ton & under 90% crane capacity - Non Routine lifts		Yes	
Gross load below 15Ton or using Hiab truck – Routine lift			Yes

Crane Set-up			
Crane on a suspended platform or over critical infrastructure or services	Yes		
Crane track or outrigger pad/s close to embankment or excavation <sup>1</sup>	Yes		
Special lift devices (e.g., bespoke gantry systems, climbing jacks, strand jacks, derricks)	Yes		
Land based cranes on barges <sup>2</sup>	Yes		
Crane on unproven or reclaimed ground		Yes	
Crane on firm assessed ground <sup>3</sup>			Yes
Crane Exclusion Zones			Yes

Crane Operation			
Lifting with single crane and two <sup>2</sup> winches	Yes		
More than two <sup>2</sup> cranes	Yes		
Where any part of the Crane/load could encroach overhead powerline safe approach distance	Yes		
Two <sup>2</sup> crane lifts involving complex manoeuvre and / or pass out operations	Yes		
Superlift operation	Yes		
Simple two <sup>2</sup> crane lifts (e.g. lift and lower)		Yes	

Uncontrolled when printed



## Manage Mobile Cranes & Lifting Operation

SEQ-PR-077

Complex manoeuvres (single <sup>1</sup> crane)		Yes	
Congested areas		Yes	
Standard Crane Set-up			Yes

Rigging and Loading			
Custom designed / bespoke rigging	Yes		
Workboxes	Yes		
Precast Tilt up Panels	Yes		
Complex Rigging	Yes		
Pre-Cast elements (excluding tilt up)		Yes	
Demolition (including pile removal) <sup>4</sup>		Yes	
Loads with no engineered lift points or lifting method is difficult to sling		Yes	
Loads with OEM approved lift points or slinging method			Yes
Simple rigging arrangements (including spreader bars and lifting beams)			Yes

### 3.4.2. Ground Conditions and Surrounding Area

1. Minimum clearances between closest edge crane support and edge of excavation:
  - For compact ground = at least equal to the depth of the excavation (1:1 rule)
  - Non compacted, loose or backfilled ground = twice the depth of the excavation (2:1 rule).
2. Where land based cranes are to be used on barges the crane must be de-rated accordingly and barge checked by Naval Architect for suitability. Dynamic Amplification Factors are to be applied to the gross lifted load in accordance with marine lifting standards. Alternatively, a Naval Architect may be engaged to determine accurate dynamic amplification factors based on specific conditions.
3. Assessment of ground for low risk lifts to be completed prior to lift by work crew. For medium and critical category lifts, an assessment by a geotechnical engineer must be completed prior to lifting.
4. Dynamic effects on crane, rigging and load must be considered in all piling related activities.

Compile following documentation and certificates:

- SWMS
- Permit to work (Working at Heights Only e.g. man basket)
- Overhead Powerlines Permit
- Risk assessment
- High Risk Work License for:
  - Crane operator or
  - Rigger/Dogger.
  - Lift Plan (plans must clearly record load details, crane details, lifting gears details, type of crane/machine used lifting methods and calculations, maximum outrigger load for specified configuration) Use SEQ-FM-068 Crane Lift Plan or crane contractor template.
- Lift Study for high risk lift will include Lift Plan and additional information (details of the crane configuration, load and rigging components, rigging study, ground condition, weather condition, written operational sequence, signalling requirements, site obstructions, drawings, have to be approved by competent person)
- Refer to AS 2550.1 Crane, hoist and winches - Safe use and Safe Work Australia General Guide for Cranes.

Uncontrolled when printed



### 3.5. Crane Lifted Work Boxes

Plant specifically designed to lift and support people while they work should be used if they need to access an elevated work area. This can include scaffolding and elevating work platforms.

If it is not possible to use plant specifically designed to lift people, a crane-lifted work box may be used to help workers perform minor work for a short amount of time. A risk assessment must be completed establishing that the use of a workbox is safer than all other alternative means, and the structural adequacy of the landing area has been established and the landing area is clear. In such circumstances, a safe work method statement and lift study must be developed and implemented for the operation. SEQ-FM-042 Crane Workbox Permit must be completed prior to commencing Work.

An Emergency Rescue plan must be completed and attached to SEQ-FM-XX Crane Workbox Permit prior to works commencing.

#### 3.5.1. Work Box Requirements

Work boxes must be design registered with the regulator.

Crane-lifted work boxes should:

1. have the working load limit, tare mass and design registration number clearly marked e.g. on a data plate
2. have sides not less than 1 metre high
3. have fall-arrest anchorage points
4. be correctly tagged
5. have lifting slings supplied to be attached to the lifting points by hammerlocks or moused shackles
6. have a safety factor for each suspension sling of at least eight for chains and 10 for wire rope
7. where provided, a door is to be inward opening only and self-closing with a latch to prevent unintentional opening, and
8. first aid boxes to be provided with outward opening doors for ease of access, but doors are to be self-closing with automatic latches.

#### 3.5.2. Crane Requirement

If a crane is to lift a work box the crane should:

1. where practicable, be equipped with a secondary back-up system that will prevent the load from falling if the primary lifting device fails
2. have a minimum rated capacity of at least twice the total load of the workbox and its contents at the maximum radius for the task to be performed and not less than 1000 kg
3. be fitted with an upper hoist limit—anti-two block—that stops operation of the hoist, luff and telescope functions of the crane or be designed so two-blocking cannot damage part of the crane or lifting gear, and
4. have levers and foot pedals fitted with a constant pressure system so crane motion stops immediately after the operator removes pressure from the controls.

If the crane is fitted with a free fall facility, this function should be positively locked out to prevent inadvertent activation when lifting a work box.

Where a crane has a brake acting directly on the drum, the braking efficiency of the hoisting drive train should be tested by hoisting and holding a load:



## Manage Mobile Cranes & Lifting Operation

SEQ-PR-077

- equivalent to the line pull of the hoist winch, or
- not less than twice the maximum hoisted load.

If the crane will be used to lift other loads the test should be repeated before re-lifting the work box.

During operation of the crane with a work box the line pull of the hoist winch should not exceed that used in the test.

### 3.5.3. Using crane Lifting Boxes

Crane-lifted work boxes do not provide a level of safety equivalent to properly erected scaffolding, elevating work platforms and other specifically designed access systems.

However, using a crane-lifted work box does provide a higher level of safety than using fall-arrest systems as the primary control measure.

To help make sure people in a crane-lifted work box are safe:

- the work box must be securely attached to the crane
- full body fall-arrest harnesses should be worn at all times
- harnesses should be attached to fall-arrest anchorage points in the work box or to the main sling ring above the heads of the workers
- directions to the crane operator should only be provided from the workbox by a person holding a dogging or rigging licence
- the crane must not travel while suspending a work box
- workers remain substantially inside the work box while it is lifted or suspended, and
- emergency retrieval arrangements are put in place before the lift so workers can safely exit the work box in the event of crane failure.

## 3.6. Lifting Equipment

All lifting equipment shall comply with following frequency inspection Table 1:

Table 1:

Item	Frequency	Record	Responsibility	Standard / Guideline
Lifting Devices Slings, Chains, Hooks, Shackles, Clutches Wire Ropes	Slings, Chains, Hooks, Clutches and Shackles before each use, inspection for wear, nicks, twisting and tears. If sever wear, tag missing and SWL or WLL is not visible discard, or tag out to repair. <b>Chains Slings refer to Table 2 of this Procedure for tagging frequency &amp; Appendix A and B</b> a) After manufacture. b) When damaged and when load bearing components have been replaced.	Contractors Lifting Gear Register, Lifting Register SEQ- FM-027	Plant operator, Suitably qualified person, Competent person, Sub Contractor, WHS Rep, HSEQ Manager, Site Manager, Project Manager	AS 2741 Appendix B, AS 1353 Section 9, AS 4990 Section 16.2, AS 2321 section B9, AS 3775.2 Section 9 & Appendix C Work Cover Dogman Guide Part 2 Lifting Gear, AS 4497.2 AS 3850.1:2015 Section C2.6

Uncontrolled when printed



## Manage Mobile Cranes & Lifting Operation

SEQ-PR-077

	c) When it is missing its tag. Lifting Clutches tested and identifiable tag every 12 months			
--	---	--	--	--

Table 2:

41

AS 3775.2:2014

APPENDIX C

PERIODIC INSPECTION GUIDE FOR ALLOY CHAIN SLINGS—T(80) OR  
V(100)

(Informative)

Number of lift cycles per week	Inspection monthly	Inspection 3 monthly	Inspection 6 monthly	Inspection 12 monthly
1 to 5	—	—		Yes
6 to 25	—		Yes	—
26 to 200	—	Yes		—
201 plus	Yes	—		—

NOTE: The above is a guide and the inspection schedule has to be determined by the end user based on the duty cycle (of M3 as specified in AS 1418.1) and the environmental conditions of use.




### 3.6.1. Identifiable Tags on Chains, Slings, Hooks, Clutches and Shackles



Identifiable markings  
on Chain Slings

**Note:** 90 and 120  
angles are no longer  
allowed when  
reeving a load and  
therefore are not  
applicable on tags.

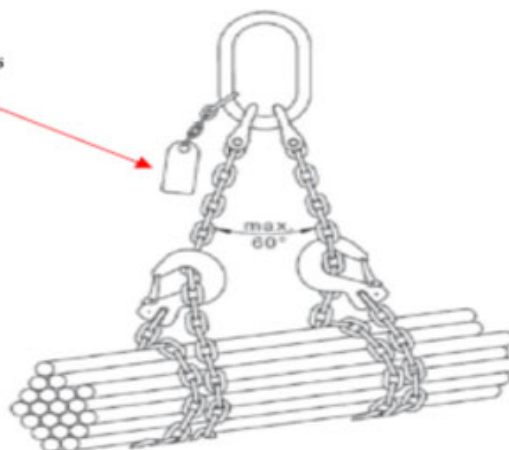

Identifiable markings  
on Synthetic Slings




NOBLOTECH Round sling with the cover  
pulled back for checking tag details



Identifiable markings  
on Hooks and Shackles




**⚠ WARNING** If any damage such as the following is visible, the sling shall be removed from service immediately. Photos depict examples of sling damage, but note they are extreme examples provided for illustration purposes only.

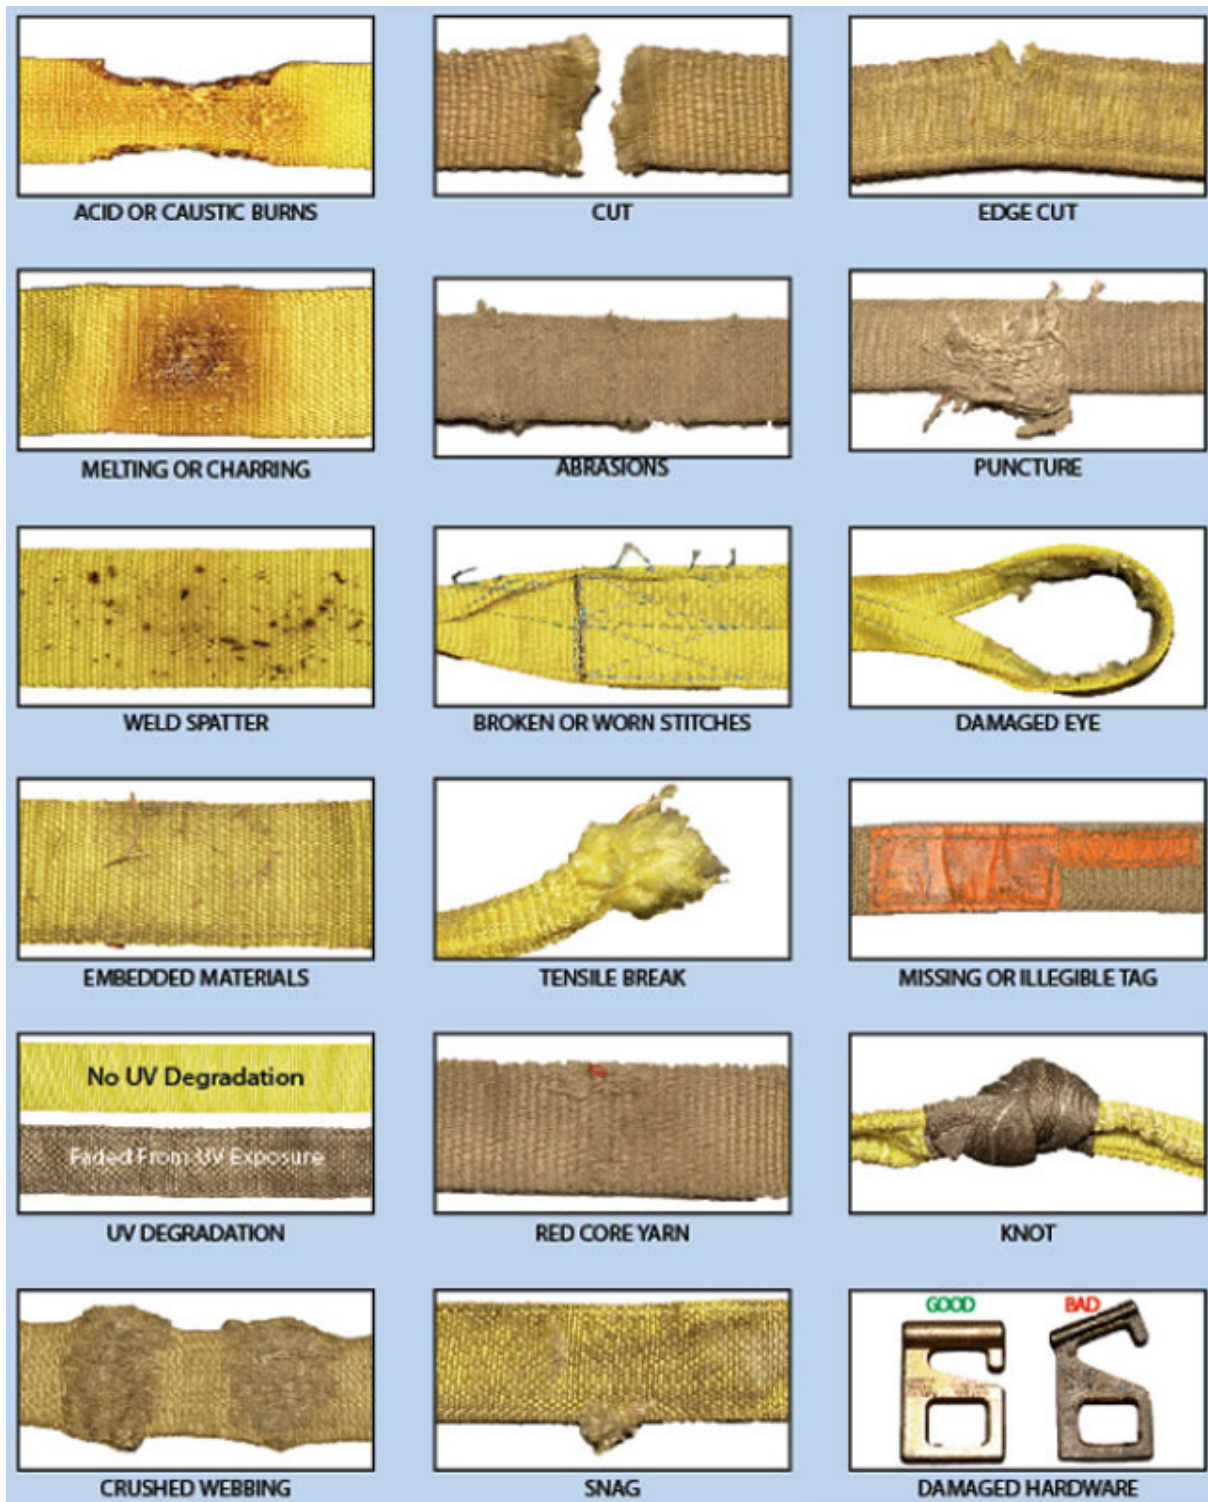

Uncontrolled when printed



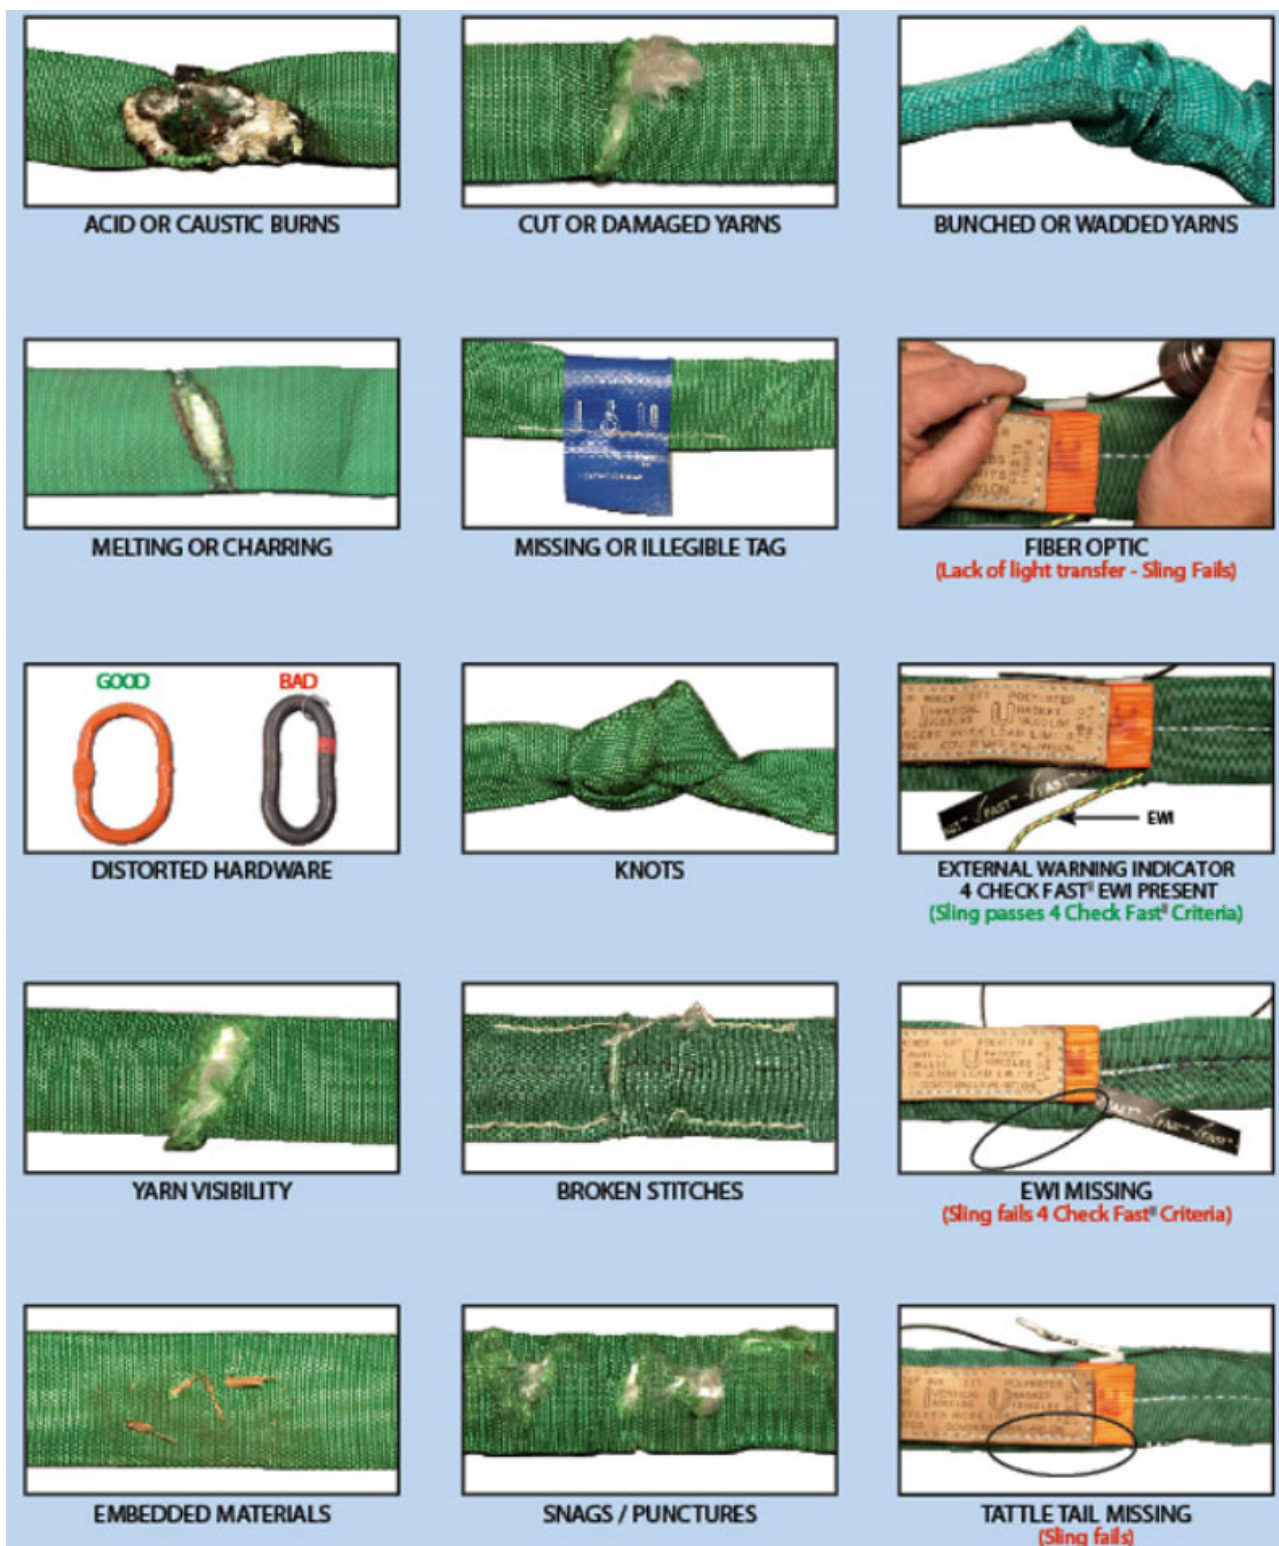

### 4. Swift Lift Clutches Section 2.6 of AS 3850.1:2015

#### Section 2.6 of AS 3850.1:2015



Prior to each use, inspections of the lifting clutches shall be conducted to check for wear and deformation to supplier's specification. A proof test using a load equal to 1.2 times the WLL shall be conducted and recorded for each lifting clutch at intervals of not more than 12 months commencing from the date of first use.

Each clutch shall be permanently marked with the following information:

- (i) A unique identifier (traceable to the proof tests).
- (ii) The manufacturer's symbol or name.
- (iii) Its WLL or compatible anchor identifier.

**C2.6** Suitable identification of lifting clutches may be by permanent marking on the clutch itself or attachment of a durable tag.

Following visual inspection of the lifting clutch, if there are any safety concerns, a proof test and a fluorescent magnetic particle should be conducted.

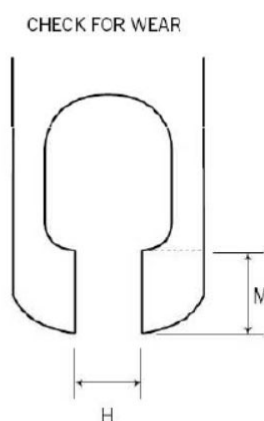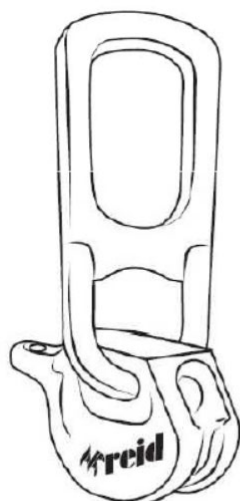

Size	H max (mm)	H min (mm)
1.3	13	5.5
2.5	18	5.5
5.0	25	8.0
10.0	32	12.0
20.0	46	18.0
32.0	58	24.0



### 4.1. Commence Work

**Accountability: Site Manager, Supervisor or Subcontractor Supervisor**

- Ensure that all workers have signed onto the relevant Lift SWMS.
- Ensure all controls identified in the Lift documentation are in place, before work commences.
- Conduct a pre-start briefing and ensure all workers sign onto the Pre-Start Form.

Refer to Project Safety Management Plan.

### 4.2. Monitor Work

Accountability: Project Manager, Engineer, Crane Operator (Rigger/Dogman) WHS Representative or delegated person

Establish a documented system to ensure regular monitoring is conducted on the tasks. Include as a minimum:

- Daily supervisor inspections
- SWMS Compliance

Inspections of plant equipment used in accordance with the instructions provided by the manufacturer.

Conduct SWMS Compliance assessment to ensure compliance and the ongoing effectiveness of the control measures.

- Refer SWMS Compliance.
- Competent Person(s)

Persons who have been appointed or been given the responsibility for planning lifting operations should have sufficient technical, practical and theoretical training, knowledge and experience of the work they are likely to safely plan /assess the lift.

They shall:

- Be capable of identifying the hazards and risks associated to lifting operations within their area of work or the environment where the lifting operation will take place.
- Be able to select the correct lifting equipment for the work. Understand the characteristics of the lifting equipment they are selecting and the nature of the work it will be carrying out.
- Carry out and document risk assessments (lifting operation) or site surveys; have the ability to communicate their findings to those involved in and affected by the lifting operations.
- Be able to create method statements or lifting plans and implement safe systems of work for lifting operations.

Where appropriate seek additional support and expertise including the use of external specialists to assist them with the planning of lifting operations.

Responsible Person = Project Manager, Engineer, Crane Operator (Rigger/Dogman) or delegated person

### 4.3. Crane Inspection, Maintenance and Registration

Prior to commencing on site, the project team must ensure evidence of the following maintenance and registration criteria has been submitted and approved:

- **Routine inspection and maintenance** - Regular inspection, maintenance and repair are to be carried out in accordance with the manufacturer's instructions or those of a competent person. For inspections, if this is not practicable, they must be completed at least annually.



## Manage Mobile Cranes & Lifting Operation

SEQ-PR-077


- **Annual Inspection** - Regular inspections must be carried out in accordance with the manufacturer's instructions or those of a competent person or, if this is not reasonably practicable, annually.
- **Major Inspection** - A major inspection must be completed for registered mobile and tower cranes. Non-registrable mobile cranes and bridge and gantry cranes should have a regular 'major' inspection completed so that they continue to be safe to operate. If it is not reasonably practicable to inspect a crane according to either of these, you should inspect the crane at least every 10 years from the date the crane was first commissioned or registered, whichever was first.
- **SafeWork Registration/ Design Registration**

Daily Operational Prestart inspection must be completed by the operator prior to each shift. The operator must report any defects to their supervisor and ensure prompt remediation.



### 5. Flow Charts

Flow Chart for Identification of Routine or Non-Routine Lifting Activities (High Risk)

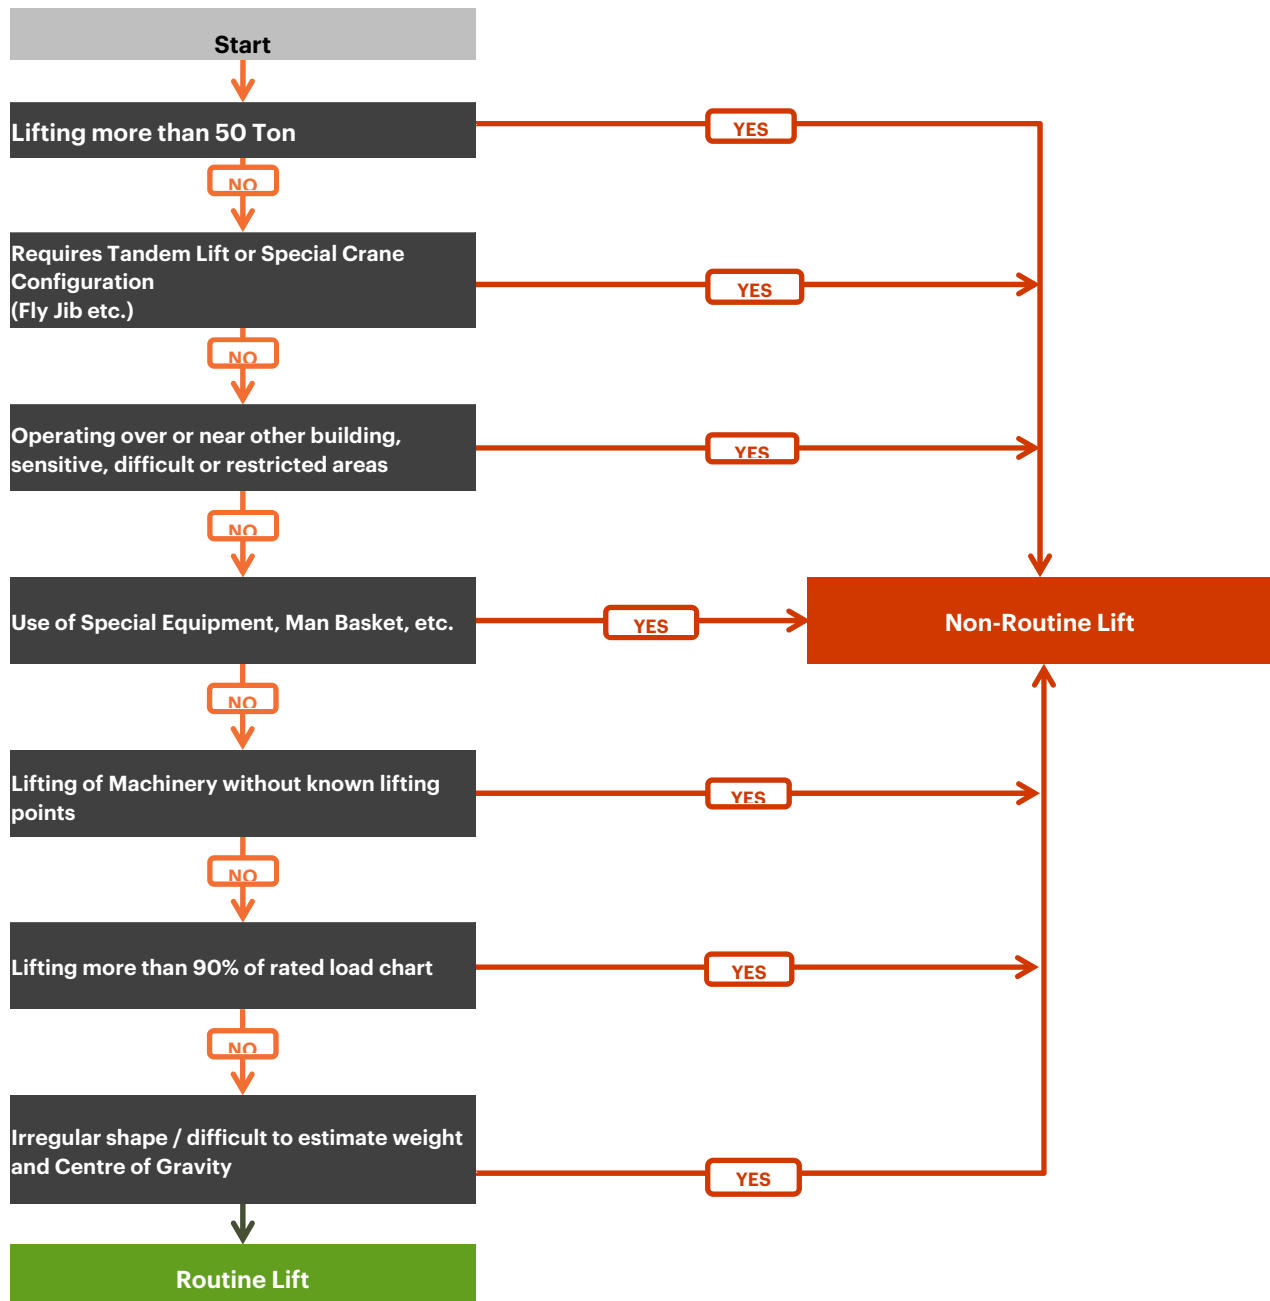




## Manage Mobile Cranes & Lifting Operation

SEQ-PR-077

Planning and Execution of Routine and Non-Routine Lifts

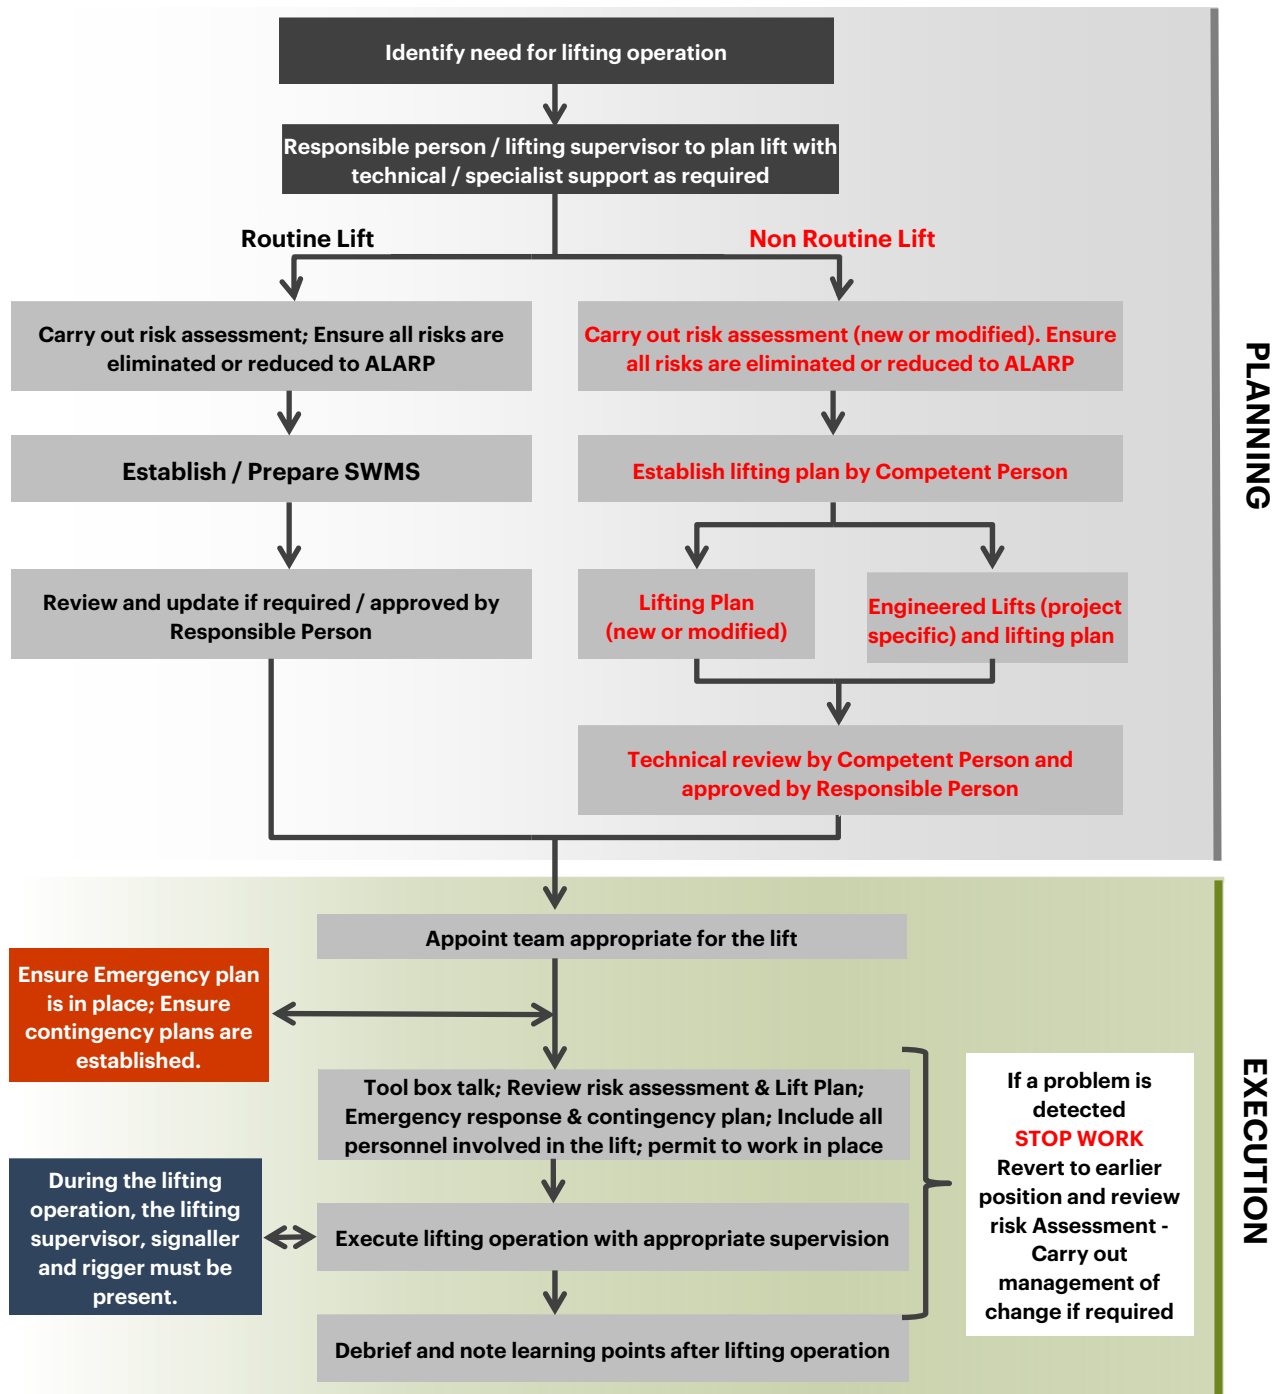

Uncontrolled when printed





### 6. Training

Haslin shall provide training in hazard identification, risk assessment and control for personnel to carry out the tasks and will ensure all operators are provided with initial training on the operation and maintenance of equipment. A record of all operator training provided to employees is recorded in their relevant proficiency or in their personnel records.

Training and competency requirements must be completed in accordance with the SEQ-PR-069 Training and Competency Procedure and SEQ-RG-002 Skills Matrix.

### 7. Relevant Templates, Forms and Checklists

SEQ-FM-068 Crane Lift Plan

SEQ-FM-065 Overhead Powerlines Permit

SEQ-FM-042 Workbox Permit